



# Adjustment Instructions

## 0785 Patriot Plus Flag Hinge



### Compression Adjustment

**+/- 1.5mm**

**4mm Allen Key**

Rotate the Allen Key Clockwise or Anti-Clockwise to give the required compression setting  
Ensure compression is evenly distributed across all hinges  
Note: In rotation positive "click" positions are felt - (2 in each direction from the central position)




### Height Adjustment

**+ 8mm**

**- 0**

**5mm Allen Key**

Rotate the Allen Key Clockwise give the required height setting  
Ensure that the weight of the door is evenly distributed across all hinges

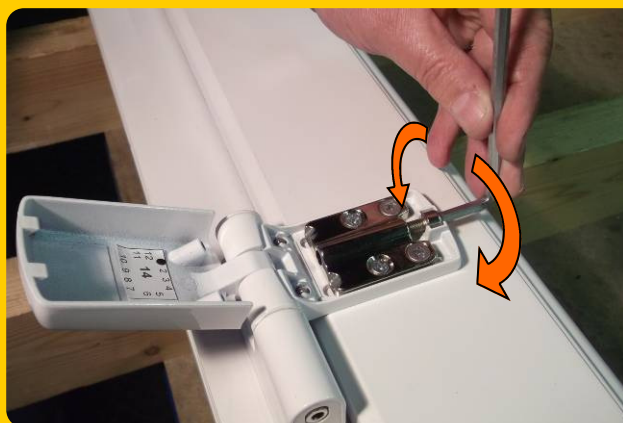

### Lateral Adjustment


**+/- 6mm**

**5mm Allen Key**

Rotate the Allen Key Clockwise or Anti-Clockwise to give the required lateral setting  
Ensure even distributed across all hinges

For care and cleaning refer to Trojan Products Care and Maintenance Instructions  
Complete door hardware suite available from Trojan - [www.trojangroup.com](http://www.trojangroup.com) - 01922 713933

### Removing the Door

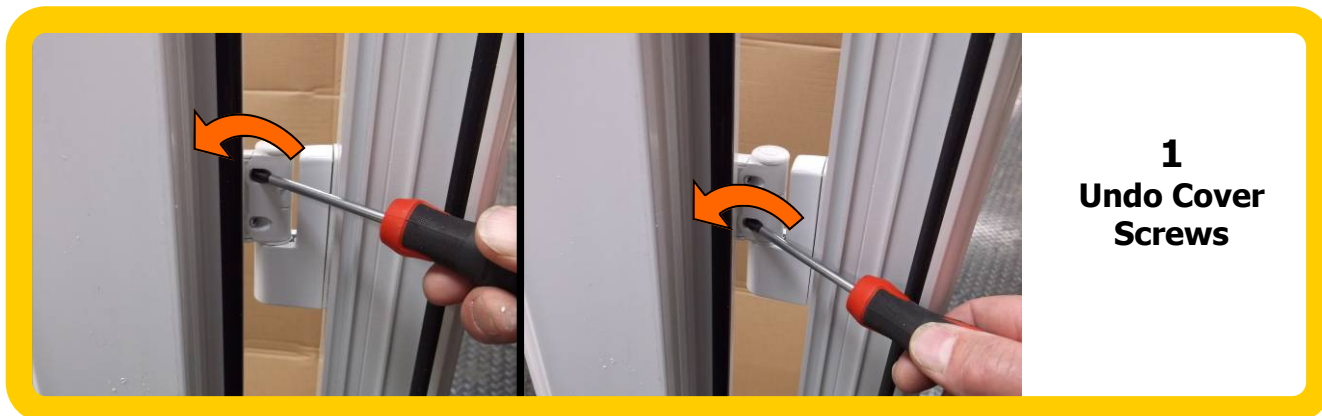

Open the door to access the Cover Retaining Screws. These are self retaining screws therefore to release the cover the screws must be completely unscrewed however the screws do not come out



Pull the cover out towards the centre of the door. On release a click will be heard. If the cover does not open by hand a screw driver can be used behind the knuckle to gently assist opening. Repeat stages 1 and 2

